



Donaldson
FILTRATION SOLUTIONS

PP-TF N **NOMINAL DEPTH** **FILTER ELEMENTS**

Process Filtration

Donaldson LifeTec® PP-TF N filters are nominal rated depth type filters constructed of 100% polypropylene. The PP-TF N filters deliver outstanding flow rates and high throughput, with nominal particulate retention from 1 µm up to 50 µm and high dirt holding capacity.

The all-polypropylene construction provides broad chemical compatibility and low extractable levels in a wide range of fluids and applications.

This extremely durable design maintains consistent porosity and impurity retention throughout its service life without shedding or unloading contaminations.

All components meet the EU and USA requirements for Food Contact Use in accordance with CFR (Code of Federal Regulations) Title 21 and EC/1935/2004 and subsequent amendments. The filter element is manufactured in accordance with the GMP requirements as defined in EC/2023/2006, has no migration of filter media, is non-fiber releasing and is thermally welded.

All materials used do not contain any Substances of Very High Concern (SVHC) as defined in EC/1907/2006 and EC/65/2011.



PP-TF N

FEATURES & BENEFITS

- Extremely high dirt holding capacity
- Excellent flow rate
- Regenerable
- Highly robust construction
- Approved for Food Contact Use according to CFR Title 21 & EC/1935/2004

APPLICATIONS

INDUSTRIES & APPLICATIONS		PURIFICATION AND FILTRATION		
Chemical	Beverages	Cosmetics	Lubricants	Jet Printer Inks
Food	Environmental	Oils	Paints and Dyes	
FOOD & BEVERAGE PURIFICATION		CHEMICAL PURIFICATION		
Well Water	Mineral Water	Acids	Alcohols, Aldehydes	Photolithographic Liquids
Tap Water	Soft Drinks	Bases	Esters and Ketones	

SPECIFICATIONS

QUALITY TEST

All products have been inspected and released by Quality Assurance as having met the following requirements:

- The traceability of each filter element according to EC/1935/2004 is provided by the serial number.
- All filters show no migration of the filter medium and are non-fiber releasing.
- All PP-TF N filter elements are completely staged, assembled, tested and packaged in Class 7 clean room facility, whose Quality Management System is approved by an accredited registering body to the appropriate ISO 9001 Quality Systems Standard.

MATERIAL COMPLIANCE USA

All components of the PP-TF N filter element are FDA listed for food contact use in the Code of Federal Regulations (CFR), Title 21.

MATERIALS		CFR TITLE 21
Filter Material	Polypropylene	177.1520
Upstream Support	Polypropylene	177.1520
Downstream Support	Polypropylene	177.1520
Outer Guard	Polypropylene	177.1520
Core	Polypropylene	177.1520
End Caps	Polypropylene	177.1520
O-Rings	EPDM	177.2600
	Silicone	177.2600
Sealing Method	Thermal Bonding	


MATERIAL COMPLIANCE EU

The PP-TF N filter element meets the guideline for Food Contact Use as given in European Regulation (EC) Number 1935/2004. All polymeric components (polypropylene) meet the requirements of EU Directive EC/10/2011 relating to plastic materials and articles intended to come into contact with foodstuffs. Migration tests have been carried out in simulants after flushing or in flow conditions. All materials used do not contain any Substances of Very High Concern (SVHC) as defined in EC/1907/2006 (REACH Guideline) and EC/65/2011 (RoHS Guideline) and are free of any latex-based components. Furthermore the materials do not contain any Animal Derived Ingredient (ADI-free) and thus bear no risk of transmitting TSE and BSE.


INTEGRITY TESTING

Nominal Retention Rates	1 μm , 3 μm , 5 μm , 10 μm , 15 μm , 25 μm , 50 μm	
Filtration Surface	> 0.6 m ² per 250 mm element (10")	
Maximum Differential Pressure	Operating Temperature	Differential Pressure
	100°F	80 psi
	150°F	60 psi
	180°F	30 psi
Cumulative Steaming Time	For this element type steaming is not recommended	

For information on test equipment or test services, please contact your Donaldson Sales Engineer and visit our website at www.donaldsonprocessfilters.com.

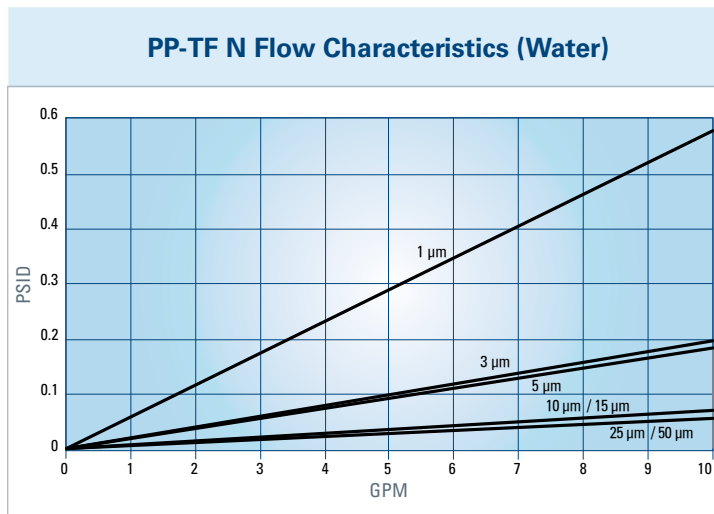

DIMENSIONS

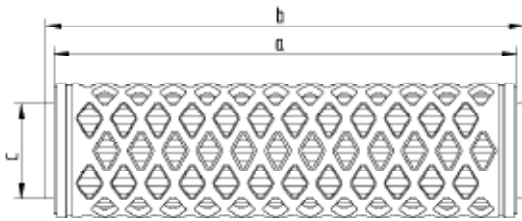

Filter Size	DOE Connection		
	Dimensions (in)		
	a	b	c
10"	9.6	9.8	2.0
20"	19.7	19.9	2.0
30"	29.7	29.9	2.0
40"	39.7	39.9	2.0

DOE: Double open end with EPDM gaskets

Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, specifications, availability and data are subject to change without notice, and may vary by region or country.



Donaldson Company, Inc.
 Process Filtration
 PO Box 1299
 Minneapolis, MN
 55440-1299 U.S.A.

Tel 800-543-3634 (USA)
 Tel 800-343-3639 (within Mexico)
 Fax 952-885-4791
 processfilters@donaldson.com
donaldsonprocessfilters.com



F117016 (04/17) ENG PP-TF N Nominal Depth Filter Elements

© 2016 Donaldson Co., Inc. All Rights Reserved. Donaldson and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners. {Contains Donaldson proprietary technology.}